

ChemGrout®

Utiform Delta-Mini

Continuous Mixing Grouting System

Narrow enough to easily roll through doorways, the Delta-Mini is ideal for both spray and pour applications.

**ChemGrout's
Delta-Mini**

**NEW from
ChemGrout®**

- Portable
- Easy to use
- Versatile



Specifications

Maximum output	3 gpm	Air compressor	6 cfm, 73 psi, 1.3 hp
Pumping distance	50 ft.	Water pressure required	44 psi
Loading height	41"	Electrical connection	230V, 50Hz, Single Phase, 16 amps
Pumping pressure	220 psi	Size	56"L x 24"W x 51"H
Power of mixing motor	3 hp	Weight	340 lbs

**Complete self-contained
unit ideal for:**

- EIFS
- Fireproofing
- Stucco
- Plaster
- Self-leveling underlayments
- Mortar sprayer

ChemGrout®

Widest Selection of Grouting Equipment in the World

Delta-Mini

FEATURES:

- Mixing pump for premixed material for interior and exterior applications.
- Machine is filled with drymix materials.
- The installed water dosing system guarantees a continuous mix of the material.
- The machine stops automatically if the water pressure is insufficient.
- Homogenous and continuous mix guaranteed by flowmeter and water pump.

ADVANTAGES:


- Easy transport. The machine can be taken to parts within minutes.
- Compact and robust.
- Maximum power due to special electric control box.
- Low filling height.
- Easy to use and maintain.
- Fast and easy cleaning.
- Chassis based on 4 wheels for easy transport on construction site.

SERIAL EQUIPMENT:

- Air compressor 170 l/min.
- Cleaning tools.
- Tool kit (cleaning balls and spanners)
- Mixing shaft.
- Water pump 230V 50 Hz.
- Parts book and instruction manual.
- Spray gun.

SPARE PARTS:

Always ask for original tools and spare parts. Due to continuous improvement and development all machines can be modified without previous advice.

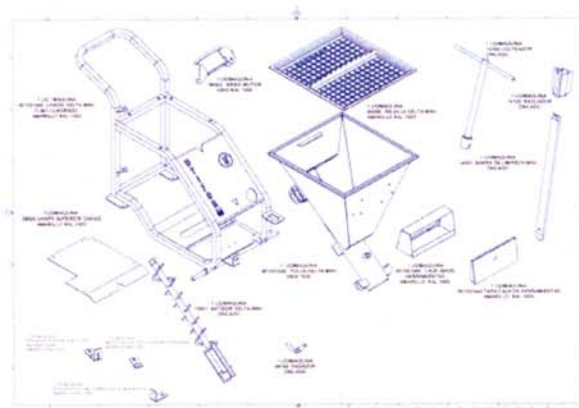

1. Chassis



2. Electric control box. EU NORM 73/23 EU



3. Easy to work in narrow spaces



4. Plastering application



5. Air compressor 170l/min

Specifications

Maximum output	3 gpm	Air compressor	6 cfm, 73 psi, 1.3 hp
Pumping distance	50 ft.	Water pressure required	44 psi
Loading height	41"	Electrical connection	230V, 50Hz, Single Phase, 16 amps
Pumping pressure	220 psi	Size	56"L x 24"W x 51"H
Power of mixing motor	3 hp	Weight	340 lbs



6. Convenient height for loading

ChemGrout®

Widest Selection of Grouting Equipment in the World

ChemGrout, Inc., P.O. Box 1140, 805 E. 31st Street, LaGrange Park, IL 60526 USA

Phone: (708) 354-7112 • Fax: (708) 354-3881

Visit our web site: www.chemgrout.com • E-mail: info@chemgrout.com